

LINE TABLE				
LINE #	LENGTH	DIRECTION	START POINT	END POINT
L-1	18.50'	N86°05'34"E	487789.17, 1403475.51	487807.62, 1403476.77
L-2	10.55'	S03°54'26"E	487824.56, 1403507.54	487825.28, 1403497.02
L-3	84.11'	S86°05'34"W	487908.48, 1403513.28	487824.56, 1403507.54
L-4	127.62'	N03°54'26"W	487824.56, 1403507.54	487815.87, 1403634.87
L-5	37.50'	N86°05'34"E	487778.46, 1403632.31	487815.87, 1403634.87
L-6	100.48'	N86°05'34"E	487815.87, 1403634.87	487916.09, 1403641.71
L-7	31.57'	N86°05'34"E	487916.09, 1403641.71	487947.59, 1403643.86
L-8	61.31'	S03°54'26"E	487916.09, 1403641.71	487920.27, 1403580.54
L-9	58.47'	S33°19'17"E	487925.23, 1403566.45	487957.35, 1403517.59
L-10	14.13'	S29°09'01"E	487957.34, 1403517.60	487964.22, 1403505.28
L-11	104.25'	S86°05'34"W	487943.60, 1403469.07	487839.60, 1403461.96
L-12	12.47'	N35°47'11"W	487823.90, 1403469.64	487816.61, 1403479.75

CURVE TABLE					
CURVE #	LENGTH	RADIUS	DELTA	CHORD LENGTH	CHORD BEARING
C-1	29.85'	19.00'	90.0000	26.87'	N41°05'34"E
C-2	15.12'	28.00'	30.9413	14.94'	S19°22'40"E
C-3	49.24'	25.00'	112.8401	41.66'	N29°40'22"E
C-4	18.35'	17.01'	61.8088	17.47'	S63°56'11"E

STAKING NOTES

1. ALL RADII ARE 3.0' UNLESS OTHERWISE NOTED.
2. ALL DIMENSIONS ARE MEASURED TO FACE OF CURB UNLESS OTHERWISE NOTED.
3. ALL SITE LIGHTING POLE DIMENSIONS ARE TO THE CENTER OF THE POLE, UNLESS OTHERWISE NOTED.
4. STAKING OF STRIPING IS TO THE CENTERLINE OF THE STRIPE, UNLESS OTHERWISE NOTED.
5. SEE SHEET C01.1 FOR GENERAL NOTES.



PANDA EXPRESS, INC.

1683 WALNUT GROVE AVE.
ROSEMead, CALIFORNIA 91770

TELEPHONE: 626.799.9898
FACSIMILE: 626.372.8268

All ideas, designs, arrangement and plans indicated or represented by this drawing are the property of Panda Express Inc. and were created for use on this specific project. None of these ideas, designs, arrangements or plans may be used by or disclosed to any person, firm, or corporation without the written permission of Panda Express Inc.

REVISIONS:

- | | | |
|----|---------------------|------------|
| C1 | 1ST COUNTY COMMENTS | 04/05/2021 |
| C2 | 2ND COUNTY COMMENTS | 06/04/2021 |

ISSUE DATE:

- | | |
|-----------------------|------------|
| ALT. STANDARDS | 12/17/2020 |
| PRELIMINARY SITE PLAN | 01/12/2021 |
| COUNTY COMMENTS | 04/05/2021 |
| ISSUE FOR BID | 06/04/2021 |

DRAWN BY: INGENIUM

PANDA PROJECT #: D8135
PANDA STORE #:
ARCH PROJECT #:



CONTRACTOR SHALL PROTECT ALL ITEMS OUTSIDE LIMITS OF CONSTRUCTION UNLESS OTHERWISE NOTED IN THE CONSTRUCTION PLANS OR SPECIFICATIONS.


CONTRACTOR SHALL FIELD VERIFY ALL EXISTING UTILITIES (LOCATIONS AND ELEVATIONS) PRIOR TO STARTING CONSTRUCTION AND ALERT ENGINEER TO ANY DISCREPANCIES IMMEDIATELY.

CONTRACTOR SHALL COORDINATE AND VERIFY LOCATION OF ALL SIGNAGE WITH OWNER PRIOR TO CONSTRUCTION.

CONTRACTOR SHALL COORDINATE AND ADJUST LOCATION OF LOOP DETECTORS TO AVOID UTILITY CONFLICTS PRIOR TO CONSTRUCTION.

CONTRACTOR SHALL INSTALL GENERAL UTILITY CONDUITS TO PLANTER AREAS AROUND BUILDING AND PATIO.

24-HOUR CONTACT:
JOE CELENTO
(912) 272-4811

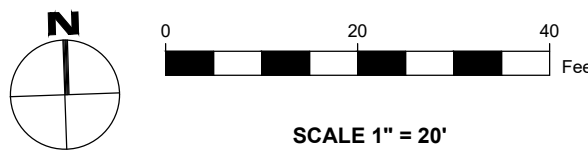

STAKING
PLAN

C03.1